

MTV₂₅



Indoor HD Rental LED Display

FOCONO

Your Local
LED
Application





LONG LIFESPAN

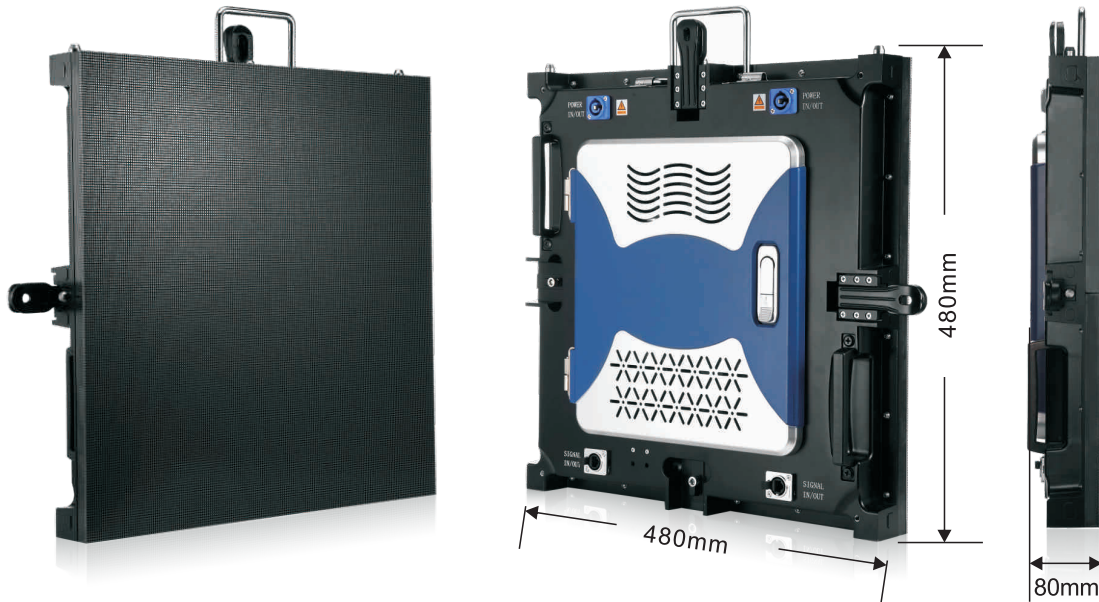


High quality components, after 1000 hours aging test under 80C, overall light decay rate less than 10%.



BLACK SMD LED



2121 black SMD LED, increase contrast ratio and enhance the visual performance.

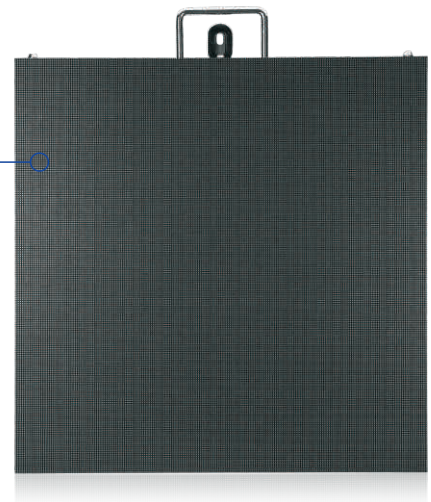


SUPER WIDE VIEWING ANGLE

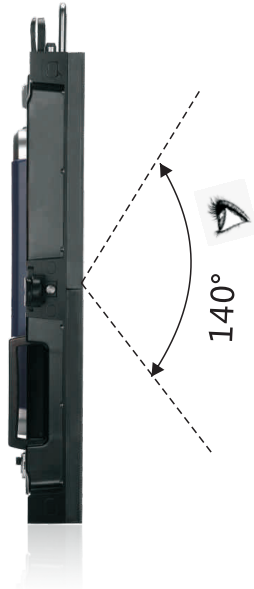

Horizontally and vertically
140 viewing angle, allow
audience to see the perfect
image from every direction.

HIGH PROFILE S-PWM DRIVER IC

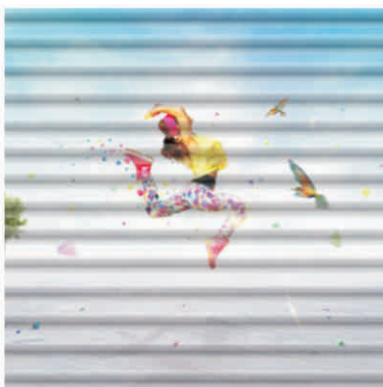

Low refresh rate



High refresh rate

The self-refresh circuit is built inside S-PWM, it can significantly increase the refresh rate, up to 1920Hz.

SEAMLESS ALIGNMENT WITH PRECISION




LCD Splicing



LED Splicing

Assemble the display from any direction, size and shape, there will be no gap or black line, only perfect visual effect.

FAST INSTALLATION

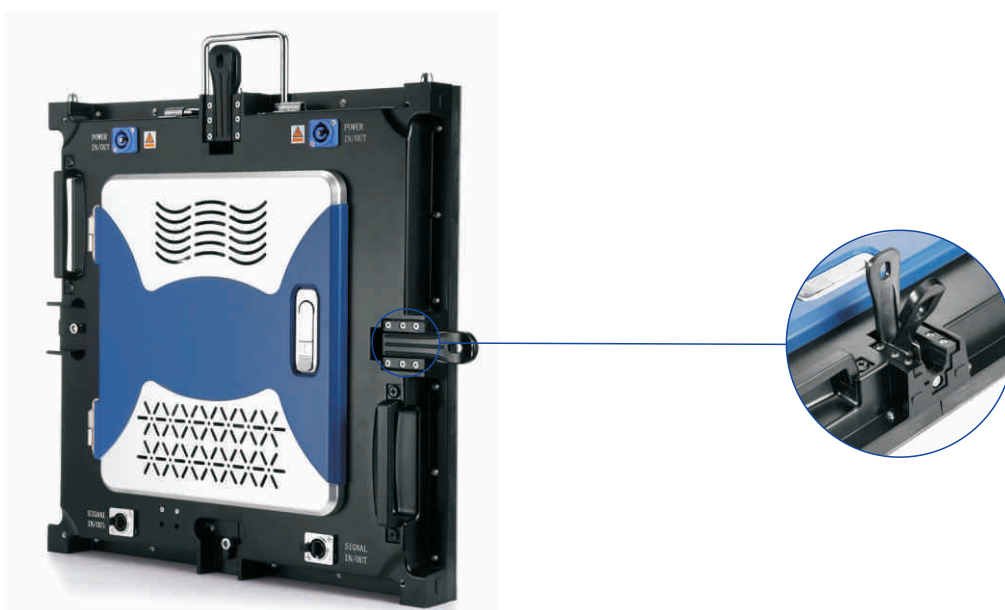

Smart lock design, simple push to connect two cabinet together.



EASY MAINTENANCE



step 1
Put the tool to
magnet the cabinet



step 2
Magnet the module, to ensure
the tool is in the middle of module



step 3
Pull the tool gently,
Taking off the module



step 4
Replace a new module
in the same way

Front service, get the job done in a few seconds.

PARAMETERS

Value	MTV25
Pixel pitch	2.5mm
Brightness	700 nits
Pixel configuration	SMD
Colours	281 trillion
Refresh rate	≥ 1920
Pixel matrix per panel	192X192
Pixel matrix per sq.m	160000
Viewing angle (H/V)	140/140 deg.
Power consumption (max/avg)	650/220 W/sq.m
IP rate	IP40/IP20
Input voltage (AC)	110/240
Panel size(L x W x H)	480X480X80mm
Panel weight(Alu.)	5kgs

APPLICATIONS

Mall, enterprise, school, stage, bank, police, traffic, custom, hospital, airport, train station, sport arena.



SYSTEM

